

JET250 G2 Self-Priming Pump

Suction head
9m

Liquid temperature
+40°C

Ambient temperature
+40°C

Max. Working pressure
4.8bar

Not suitable for
drinking water

Voltage fluctuation should
not exceed **10%** of rated value.

Basic Configuration

Mechanical sealing: ceramic / graphite / NBR rubber

Motor: two asynchronous motors, copper coils, built-in thermal protection, all closed fan-cooled, continuous operation

Protection: IP44

Insulation: Class B




1. Automatic electronic pump controller to prevent run dry damage
2. Stainless steel pump body, corrosion resistant diffuser and impeller

Application

The Shimge Jet250 G2 is an automatic pressure pump with up to 4 tap outlets.
Suitable for garden use only. Pump comes with a 2 year warranty.

Performance Curve

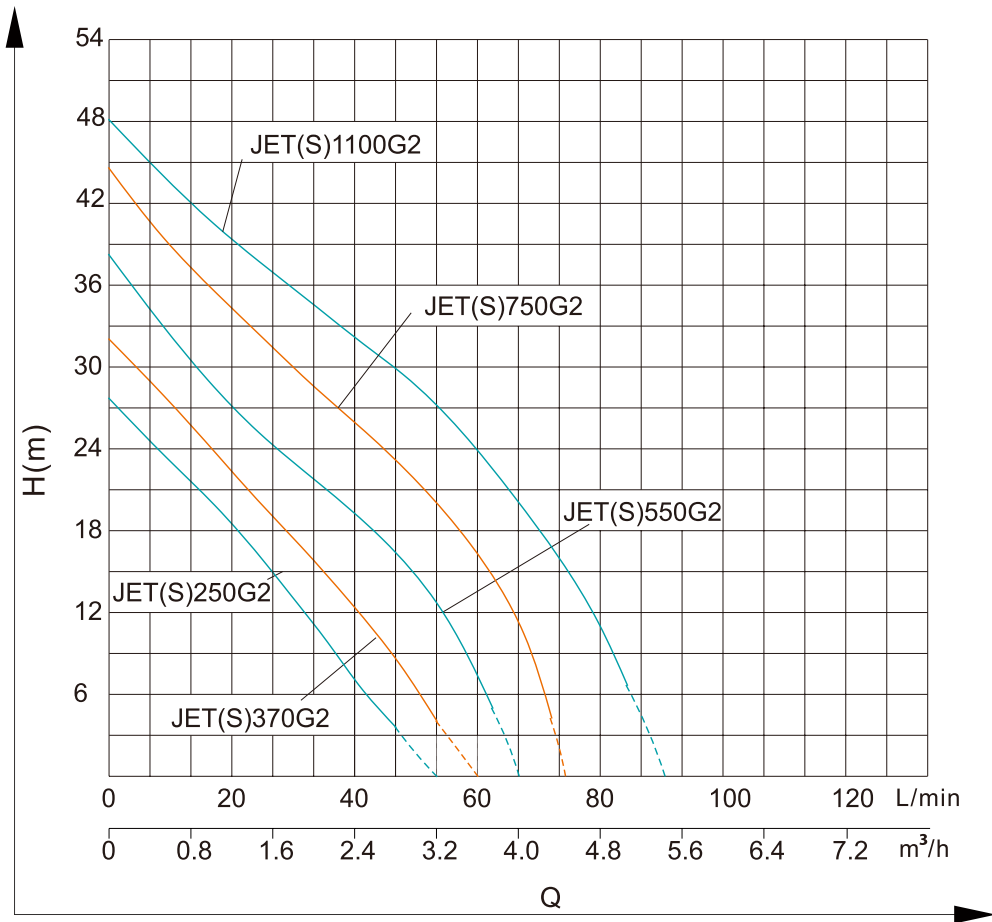

JET-G2

Model	Power		Max. Flow (m ³ /h)	Max. Head (m)	Head Range (m)	Max. Suction (m)
	Single-Phase kW	HP				
JET (S) 250G2	0.25	0.34	2.7	28	4~28	8
JET (S) 370G2	0.37	0.5	2.8	32	5~32	7
JET (S) 550G2	0.55	0.75	3.5	38	4~38	9
JET (S) 750G2	0.75	1	3.5	44	5.5~44	9
JET (S) 1100G2	1.1	1.5	4.2	48	9~48	9