

## JET250 G2 Self-Priming Pump

Suction head  
**9m**

Liquid temperature  
**+40°C**

Ambient temperature  
**+40°C**

Max. Working pressure  
**4.8bar**

Not suitable for  
drinking water

Voltage fluctuation should  
not exceed **10%** of rated value.

### Basic Configuration

Mechanical sealing: ceramic / graphite / NBR rubber

Motor: two asynchronous motors, copper coils, built-in thermal protection, all closed fan-cooled, continuous operation

Protection: IP44

Insulation: Class B




1. Automatic electronic pump controller to prevent run dry damage
2. Stainless steel pump body, corrosion resistant diffuser and impeller

## Application

The Shinge Jet250 G2 is an automatic pressure pump with up to 4 tap outlets.  
**Suitable for garden use only. Pump comes with a 2 year warranty.**

## Performance Curve

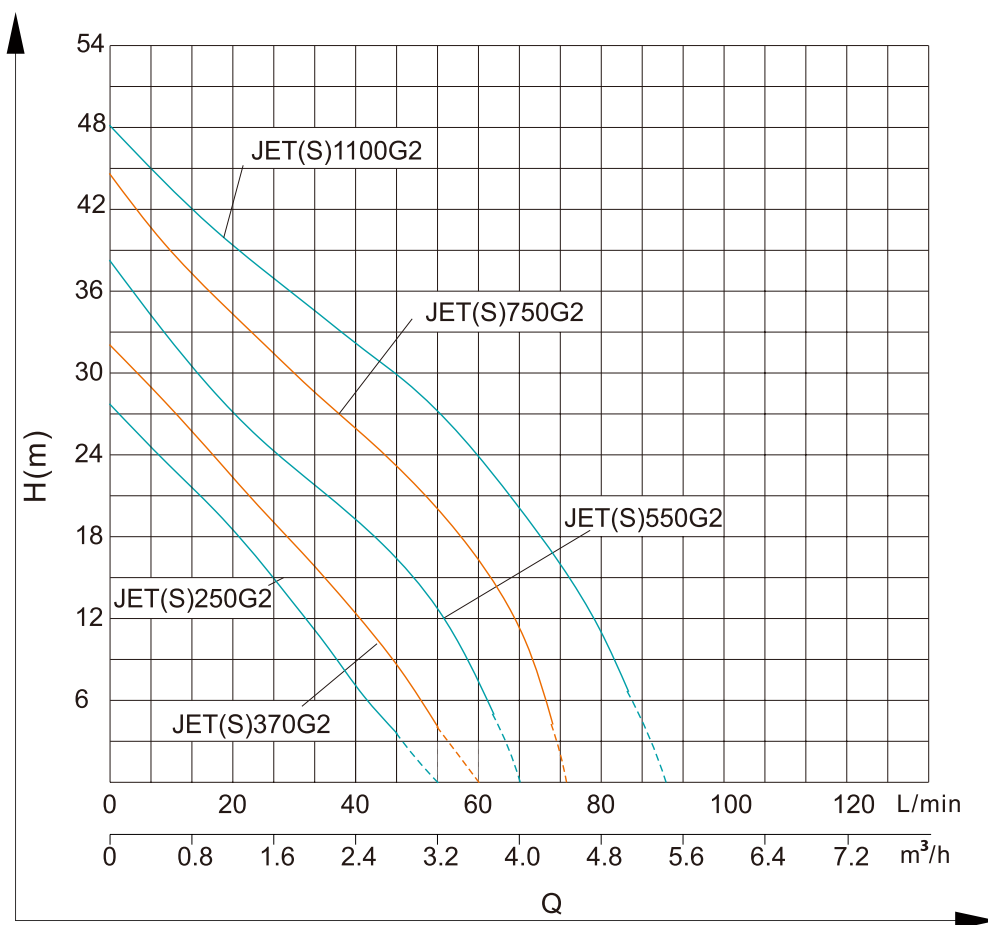

## JET-G2

Model	Power		Max. Flow (m³/h)	Max. Head (m)	Head Range (m)	Max. Suction (m)
Single-Phase	kW	HP				
JET (S) 250G2	0.25	0.34	2.7	28	4~28	8
JET (S) 370G2	0.37	0.5	2.8	32	5~32	7
JET (S) 550G2	0.55	0.75	3.5	38	4~38	9
JET (S) 750G2	0.75	1	3.5	44	5.5~44	9
JET (S) 1100G2	1.1	1.5	4.2	48	9~48	9